



- Single Phase Undercurrent Protection with Definite Time Trip Delay
- Two individually settable undercurrent relays
- For use with 1A or 5A current transformers
- Up to two individual very fast analogue output signals (<50mS), (optional)
- DIN96 Slave Indicator with full current scale (optional)

Specifications

Standard Auxiliary Voltage:	100-120V, 200-240V, 380-415V, 440-460V, 480VAC, 40-70Hz (Fuse 0,5A)
Optional Auxiliary Voltage:	24-60VDC (Fuse 0,5A) 110-220VDC (Fuse 1A)
Supply tolerance:	+10%, -20%
Power rating:	5VA
Current Input:	1A CT or 5A CT, <0,1VA
Contact rating:	AC: 100VA -250V/2A max. DC: 50W -100V/1A max.
Adjustments:	See table on the right
Ampere range:	Any % of the CT value
Analogue output 1: (see page 2 for available outputs)	mA: Up to 20mA, max 500R V: Up to 10V, min 100kohm (other on request)
Analogue output 2: (see page 2 for available outputs)	mA: Up to 20mA, max 500R V: Up to 10V, min 500ohm (other on request)
Accuracy:	Class 0,5
Temperature:	-20 to +70°C
Humidity, relative:	0-95%
Weight:	0.6kgs
Front protection:	IP21
Flammability:	UL94-V0

Description

The digitally controlled KCC103x series provides current underload protection of single phase generators or motors.

True RMS measurement not affected by heavily distorted waveforms provides highest up precision (1.0%) protection. Less than 50mS undercurrent detection.

User settable trip levels and delays. Colour of LEDs indicates alarm status. Alarm LEDs flash during count-down.

Up to two individual very fast analogue output signals (optional) proportional to a range (see page 2 for available outputs). The analogue output is isolated from the CT and auxiliary power.

Relay Configurations


R1 energises when trip level one (Undercurrent 1) is exceeded and R2 trips when trip level two (Undercurrent 2) is exceeded.

R3 is an extra status relay that energises if either alarm relay 1 or 2 is active and can be used for local indication, PMS input, alarm system input etc.

The relay operation is delayed in the arrow direction. Both trip levels can independently and individually set over the scale range (0-150% FSD). The reset is instantaneous.

Relay	U/C 1	U/C 2	Fail Safe	Latch
R1	X			*X
R2		X	X	*X
R3	X	X		*X

LED status		
Power	U/C 1	U/C 2
Normal	Alarm	Alarm



Relays shown de-energised.

R2 is fail-safe and energises when unit is powered.

*X) See the table below for models with latch function

Models	Latch	O/P 1	O/P 2	Hysteresis
KCC103E	-	-	-	X
KCC103FA	-	X	-	X
KCC103FB	-	X	X	X
KCC103G	X	-	-	-
KCC103GFA	X	X	-	-
KCC103GFB	X	X	X	-

Adjustments	Trip level	Delay
U/C1:	0-150% of FSD	0-30secs
Hysteresis	2-50%	
U/C2:	0-150% of FSD	0-30secs
Hysteresis	2-50%	

(FSD = Full Scale Deflection)


The unit meets EN 60255-27 Cat. III, Pollution degree 2 and the relevant environmental and EMC tests specified in EN 60255-26 to comply with the requirements of the major Classification Societies.

Related information:


The KCC103x series are also available for panel mounting as KCC103x series.

Connection Diagram

Connection Diagram without optional slave instrument

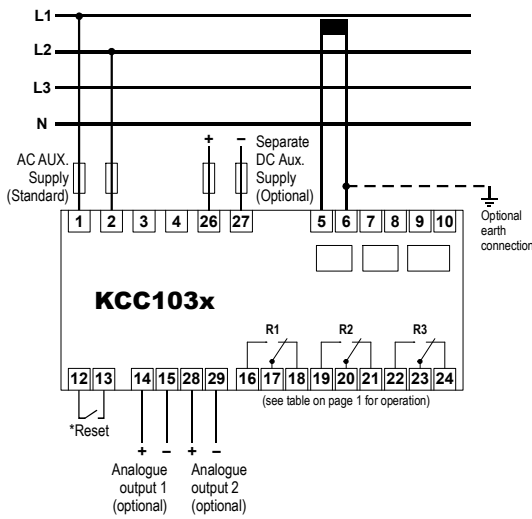

Connection Diagram with optional slave instrument

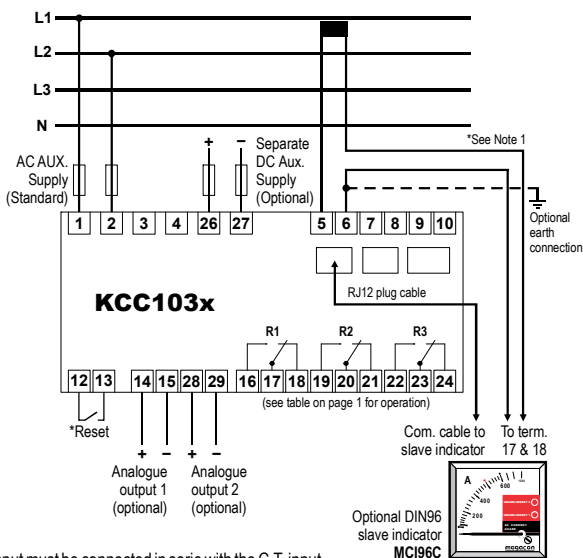

*Note 1
Slave Ammeter input must be connected in series with the C.T. input.

*Reset
Any latched relay is reset by linking terminals 12 and 13 or by interrupting the auxiliary voltage supply.

Analogue Output

The output signals are proportional to the meter reading (see page 1 for an overview of models and functions).

The signal is specifically intended as an input to a control system for monitoring or control.

Add suffix from table below to type designation to specify output required:

Outputs 1

O/P1	0 - 10mA
O/P2	0 - 20mA
O/P3	4 - 20mA
O/P4	N/A
O/P5	N/A
O/P6	N/A
O/P7	N/A
O/P8	0 - 10V
O/P9	0,2 - 10V
O/P10	4,3 - 20mA

Outputs 2

O/P11	0 - 10mA
O/P12	0 - 20mA
O/P13	4 - 20mA
O/P14	N/A
O/P15	N/A
O/P16	N/A
O/P17	N/A
O/P18	0 - 10V
O/P19	0,2 - 10V
O/P20	4,3 - 20mA

Relay Contacts

Burden on supply	: 170mW per relay
Switching voltage (Max)	: 400V AC, 300V DC
Switching voltage (Rated)	: 250V AC, 30V DC
Max I continuous	: 6A RMS, 6A DC
Max breaking capacity	: 1500VA AC, 18-120W DC
Dielectric strength across Open contacts	: 1000V RMS


Connection

Terminal type	: Terminal Clamp and Screw
Wire max.	: T1-T4, T26-T27: AWG 24-14, T5-T10: AWG 12, other terminals: AWG 24-12
Screw Torque	: 0.5Nm

Overload

Voltage	: 1.2 x Un continuous 2 x Un for 10secs
Current	: 2.5 x In continuous 5 x In for 1secs (max 25A)

Dimensions

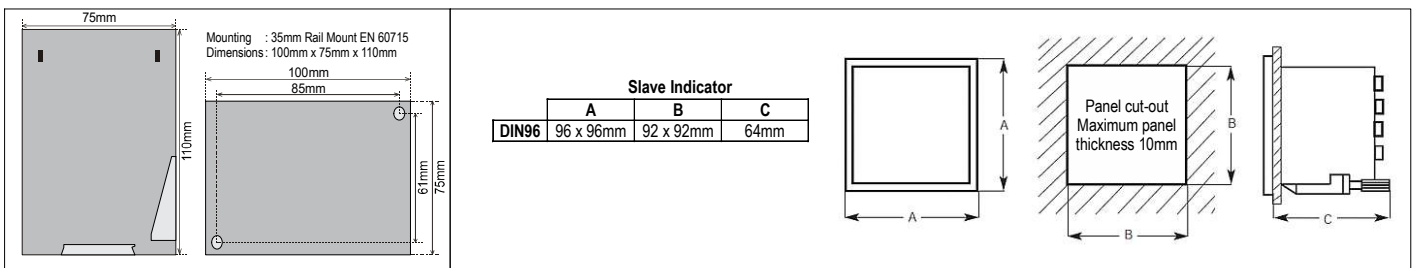

The MEGAcon policy is one of continuous improvement, consequently equipment supplied may vary in detail from this publication.

ORDERING INFORMATION

Type	: KCC103FB
Aux. Supply	: 200-240VAC
Input Current C.T.	: 1500/5A
Range	: 0-1,5/3kA
Analogue output 1	: O/P3: 4-20mA
Analogue output 2	: O/P18: 0-10VDC

Optional Separate Aux. Supply:
Add -SD for models with Separate DC Aux. Supply.
(Example: KCC103FB-SD)

